

(19) 世界知的所有権機関  
国際事務局(43) 国際公開日  
2004年3月25日 (25.03.2004)

PCT

(10) 国際公開番号  
WO 2004/023955 A1


- (51) 国際特許分類: A47J 37/12  
(21) 国際出願番号: PCT/JP2003/011499  
(22) 国際出願日: 2003年9月9日 (09.09.2003)  
(25) 国際出願の言語: 日本語  
(26) 国際公開の言語: 日本語  
(30) 優先権データ: 特願2002-263817 2002年9月10日 (10.09.2002) JP  
(71) 出願人 および  
(72) 発明者: 佐藤 忠義 (SATO, Tadayoshi) [JP/JP]; 〒116-0001 東京都荒川区町屋4丁目3番13号 Tokyo (JP).  
(74) 代理人: 田中 治幸 (TANAKA, Haruyuki); 〒160-0023 東京都新宿区西新宿1丁目3番3号品川ステーションビル4F 田中特許事務所 Tokyo (JP).  
(81) 指定国 (国内): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.  
(84) 指定国 (広域): ARIPO 特許 (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア特許 (AM,

[続葉有]

(54) Title: FOOD FRYER

(54) 発明の名称: 揚げ物器

2 -

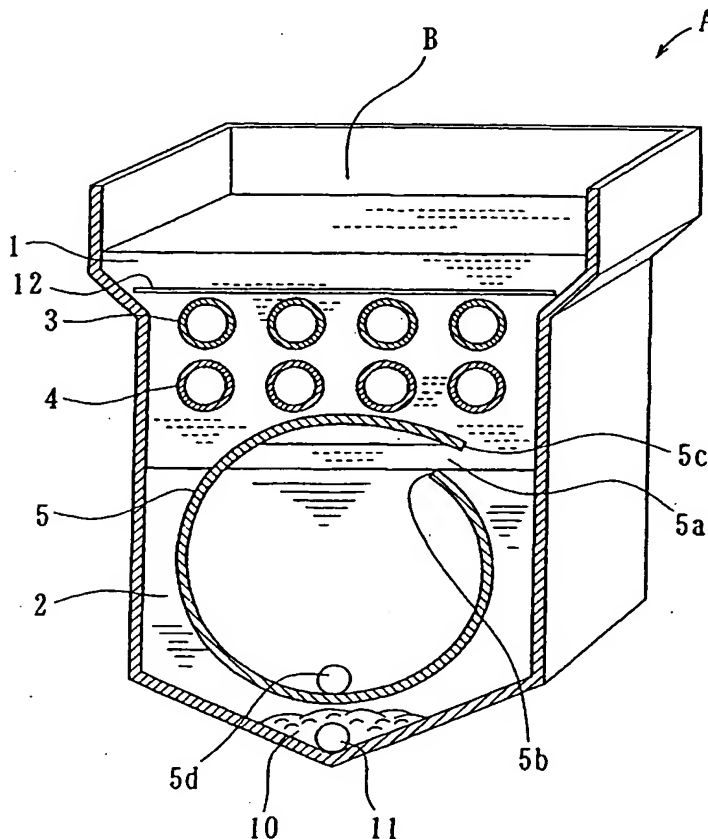

(57) Abstract: A food fryer allowing a fried food tank to be safely and efficiently cleaned, wherein an opening part (5a) is formed in the side upper part of an oil storage tank (5) so that an upper end part (5c) covers a lower end part (5b); a cock (5d) is installed at the bottom part of the tank, the opening part (5a) is positioned near a boundary between an oil tank area (1) and a water tank area (2), a cover part is not provided for the opening part, after a food frying operation is completed, first oil in the oil tank area (1) is stored in the oil storage tank (5) through the opening part (5a) by the opening and closing operation of the cock (5d) and then a cock (11) is opened to drain the oil from those portions other than the oil storage tank of the fried food tank (B), and the tank is cleaned, and when the next frying operation is started, the oil in the oil storage tank (5) is moved to the oil tank area (1) due to a difference in gravity between the oil and water by merely feeding the water into the fried food tank (B).

(57) 要約: 揚げ物槽の清掃を安全かつ効率的に行うことができる揚げ物器である。油収納用タンク(5)の側面上側に、上側端部(5c)が下側端部(5b)に被さる態様の開口部(5a)を形成し、また下側にはコック(5d)を設ける。開口部(5a)は油槽域(1)と水槽域(2)の境界近くに位置し、当該開口部に対する蓋部は設けていない。揚げ物作業終了後には先ずコック(5d)の開閉操作により油槽域(1)の油を開口部(5a)から油収納用タンク(5)に収納し、続

いてコック(11)を開くことにより揚げ物槽(B)の油収納用タンク以外の部分を空にしてから洗浄する。次回揚げ物作業を開始するときには揚げ物槽(B)へ注水するだけで油収納用タンク(5)内の油は水との比重差によって油槽域(1)の

[続葉有]

## Patent Specification

Title: FOOD FRYER

Technology field (Field of the Invention):

This invention relates to a food fryer having a frying food tank which comprises a water layer area (a water tank area) and an oil layer area (an oil tank area) there on, in which bits of fried batter are coming down to the water layer area through the oil layer area, especially having an oil storage tank formed at a predetermined position of the water layer area.

Background art (Background of the Invention):

Fig. 7 shows an external view structure of a conventional food fryer, and Fig.8 shows a sectional view of an oil layer area and a water layer area in the conventional food fryer:

1 is the oil layer area for storing food frying oil; 2 is the water layer area; 3 is a heat source such as a heating burner; 4 is an air cooling tube formed by a means such as welding on the outer wall of the oil layer area 1; 10 is bits of fried batter; 11 is a water discharge cock; 12 is a net; 14 is an oil discharge cock; 15 is an adjusting wheel or a roller for adjusting a balance of the food fryer on a floor surface; 16 is an air outlet; 17 is a thermostat for controlling the heat source 3.

Now, oil and water in the food fryer are respectively separated into the oil layer area 1 and the water layer area 2 due to the difference in specific gravity thereof, where the oil is heated by the heat source 3 to fry

meat, fish, vegetables, etc.

The cooling means such as the air cooling tube 4 provided below the heat source 3 insulates thermal conduction caused through the heated oil at a high temperature and by bits of fried batter settled down in the water during frying work so as to control oxidation of the oil and an increase of the water temperature, furthermore to avoid steam bubbles on the oil surface, which may bring difficulties in frying operation.

According to the conventional food fryer as described above, the temperature of the oil therein is usually heated up about 200 °C during the frying operation. And we must hence cool down the oil prior to cleaning the food fryer after the frying work. Furthermore, it is necessary to store the oil in a separate container and then to put it back to the food fryer, if the same oil is to be used repeatedly. In this way, it is not easy to handle the conventional food fryer.

In order to solve the problem of displacing the oil at this food fryer cleaning as described above, in US Patent No. 5,632,266 the inventor of this application disclosed a food fryer having an oil storage tank provided with each cock at its upper position and its lower position.

A preparation step in the above US Patent for cleaning the oil layer area and the water layer area out the oil storage tank of the food fryer is explained hereafter as one example. It is optional whether water is to be put into the oil storage tank prior to frying anything or not: in this example the oil storage tank of the food fryer is filled with water by user's operation of closing the lower cock and simultaneously opening the upper cock, and closing the upper cock thereafter.

The preparation steps for cleaning are as follows.

- (1) first, opening the lower cock of the oil storage tank to discharge water therein so as to being empty the tank and then closing the lower cock,
- (2) second, opening the upper cock of the oil storage tank to fully move oil in the oil layer area to this tank, thereafter closing the upper cock,
- (3) finally, opening a water discharge cock formed at the lowest end of the water layer area to drain water in the water layer area out.

The food fryer after this preparation is put in steady state: the oil storage tank contains the oil, with both the upper cock and the lower cock closed; the oil layer area and the water layer area except the oil storage tank are in empty and these areas are in space coupled to outside of the food fryer through the water discharge cock; thereby capable of cleaning both the layers outside the oil storage tank.

After the layers are cleaned, the water discharge cock is to be closed and the upper cock of the oil storage tank is to be opened, where the oil in the oil storage would flow out by merely pouring water into the food fryer due to a difference in gravity between oil and water. This state is just ready for another food frying work.

The food fryer disclosed in US Patent No. 5,632,266 is good in use for improving the efficiency of the food frying operation.

And this food fryer has room for further improvement in product cost, assembling labor and handling performance of it because the oil storage tank comprises two cocks, the upper cock and the lower clock.

The object according to the invention is to reduce the cost and the labor for making the food fryer, and to improve frying and cleaning work

by using an oil storage tank with an opening instead of the conventional upper cock, where an upper part of the opening is over its lower part and a lower cock of the oil storage tank is formed same as conventional.

**Disclosure of the invention (Summary of the invention):**

The food fryer of this invention has the oil storage tank provided with the opening for inflow and outflow of the oil, and with the lower cock for draining out water in the storage tank and filling it with used-oil at the previous frying work, the upper part of which opening overhangs its lower part.

The oil storage tank may be made in any shape such as a cylinder-like, a cubic-like, a cube-like, a sphere-like or a rugby ball-like (an ellipse in section) of vertically or horizontally long. The inside of the oil storage tank is always coupled to inner space of the frying food tank through the opening. When the lower cock of the oil storage tank is opened, the inside of the oil storage tank is also coupled to the outside of the fryer.

The opening may be formed on any upper place of the oil storage tank, preferably on the upper side wall.

In the food fryer according to the invention, when the lower cock of the oil storage tank is opened after having fried for example meat, fish or vegetables, the water in the oil storage is out drained through the lower cock, following which the oil heated at a high temperature flows into the oil storage tank from the oil layer area through the opening. After a certain time, closing the lower cock allows the oil storage tank to be filled with the used oil. And the water discharge cock of the water layer area is

opened.

In this situation, cleaning work for inside of the food fryer, which is the oil layer area and the water layer area outside the oil storage tank, can commence efficiently, safely and immediately without time elapse for cooling of the used oil.

After cleaning up the food fryer and closing the water discharge cock of the water layer area, water is newly poured into the food fryer. The water increases in the water layer area of the food fryer and eventually flows into the oil storage tank from its opening, and thereby the oil in the oil storage tank accordingly moves up to the oil layer area due to the difference in gravity between the oil and the water. In this way, the oil is put back to the oil layer area with simple operation and can be used repeatedly over and over.

Since the upper part of the opening overhangs its lower part, cleaning fluid and so on little comes into the oil storage tank in which the used oil is stored, while one is at cleaning work.

And having the opening without any cock at the upper position of the oil storage tank, this invention is effective in that number of components, assembling work thereof and factory expenses of the food fryer are respectively reduced, and in that the cleaning work next to the frying work in the food fryer is easy to be done.

#### Brief Description of the drawings:

Fig.1 shows a stage in usual frying operation of a food fryer having a cylindrical oil storage tank.

Fig.2 shows a stage of cleaning preparation in which the oil storage tank is filled with used oil of Fig.1.

Fig.3 shows a stage of putting water into the food fryer after cleaning out area of the oil storage tank of Fig.1.

Fig.4 shows a food fryer having a cylindrical oil storage tank other than that shown in Fig.1.

Fig.5 shows a compact food fryer for household use.

Fig.6 shows another food fryer having a rectangular parallelepiped oil storage tank.

Fig.7 shows an external view of the conventional food fryer.

Fig.8 shows a sectional view of the oil layer area and the water layer area in the conventional food fryer of Fig.7.

**Best mode of embodiments according to the invention (Description of specific embodiments):**

The invention is explained more in detail with reference to the attached figures from Fig.1 to Fig.6.

In these figures:

A is a food fryer having a cylindrical oil storage tank with circular sectional view;

B is a frying food tank of the food fryer A;

C is another food fryer having a cylindrical oil storage tank with ellipsoid sectional view;

D is a frying food tank of the food fryer C;

E is another food fryer for household use;

F is a frying food tank of the food fryer E;

G is the other food fryer having a rectangular parallelepiped oil storage tank;

H is a frying food tank of the food fryer G;

1 is an oil layer area;

2 is a water layer area;

3 is a heat source (heat pipe), 3' is an electric heater as a heat source;

4 is an air cooling tube;

5 is a cylindrical oil storage tank, 5a is an opening formed on the upper side wall of the oil storage tank, 5b is a lower end of the opening, 5c is an upper end (of the opening) extended to outer position than the lower end 5b to overhang it, 5d is a (lower) cock provided at the low end position of the oil storage tank;

6 is a rectangular parallelepiped oil storage tank, 6b is a lower end of the opening, 6c is an upper end (of the opening) extended to outer position than the lower end 6b to overhang it, 6d is a (lower) cock provided at the low end position of the oil storage tank;

10 is a bit of fried batter;

11 is a water discharge cock; and

12 is a net.

Any kind of energy may be used for the heat source 3 such as electricity, gas and so on.

As shown in Fig.1, the food fryer A has the cylindrical oil storage tank 5, where the opening 5a is formed at the upper side wall thereof so that oil in the oil layer area 1 moves through the opening 5a to be stored



therein, if required.

The opening 5a is arranged around a boundary between the water layer area 2 and the oil layer area 1, and formed in a shape that the upper end 5c is extended outside of the oil storage tank 5 than the lower end 5b so as to cover this end 5b.

At ordinary use state, water is in lower part below the opening 5a and oil is in upper part above the opening 5a.

Procedure for storing the oil of the oil layer area 1 into the oil storage tank 5 after finishing food frying work is as follows:

First, by opening the cock 5d, one drains the water in the oil storage tank 5 out and pours the used oil in the oil layer area 1 into the oil storage tank 5 through the opening 5a; and

Next, one closes the cock 5d at timing that the water in the oil storage tank 5 has been drained out and the oil in the oil layer area 1 has flowed into the oil storage tank 5.

As shown in Fig.2, by opening the water discharge cock 11 next to the procedure of fully putting the oil into the oil storage tank 5, the water in the water layer area 2 is also drained out and the frying food tank B becomes empty as a result, except for the oil storage tank 5, and thereby cleaning work inside the frying food tank B may be proceeded under a safety condition.

As described above, the upper end 5c of the opening 5 is extended out of the opening 5a so as to over the lower end 5b and is formed at the side wall, not top wall, of the oil storage tank 5, and hence cleaning water and so on for the cleaning scarcely pours into the oil storage tank 5 during the

cleaning work,

When the cleaning for the food frying tank B is finished and the water discharge cock 11 is again closed, merely pouring water into the frying food tank B allows the oil in the oil storage tank 5 to return to the oil layer area 1.

As shown in Fig.3, when the water pouring goes on and the water eventually comes over the lower end 5b of the opening 5a, the water starts to flow into the oil storage tank 5, following which the oil stored in the oil storage tank 5 is to be moved up to the oil layer area 1 through the opening 5a due to the difference in specific gravity between oil and water.

Meanwhile, the oil in the oil storage tank 5 may be taken to outer space of the feed fryer by opening the cock 5d.

In the food fryer C of Fig.4, its oil storage tank 5 with ellipsoid section is outward presented with at back side of the frying food tank D, and no air cooling tube is presented with in the oil layer area 1.

Other basic composition of the food fryer C is the same as that of the food fryer A shown in Fig.1.

Further to the above, since the oil storage tank 5 is provided in state of contacting with outside air at the wall of the food fryer C, it is easy to efficiently cool the oil storage tank 5 after storing the used oil therein, and hence the cleaning work for the frying food tank D is to be started in short time after the frying food tank D being emptied.

The oil in the oil layer area 1 may be also taken out by opening the oil discharge cock 14 in the state that the oil is not stored in the oil storage tank 5 as shown in Fig.4.

The food fryer E of Fig.5 is made in compact as a whole for household use, where electric heater 3' is used as heat source of oil and no air cooling tube in the oil layer area 1 is provided. Other basic composition of the food fryer C is the same as that of the food fryer A shown in Fig.1.

The electric heater 3' is repeatedly arranged in a longitudinal direction of the frying food tank F in continuous state, by contrast, it may be repeatedly arranged in a lateral direction or other any direction.

The food fryer G of Fig.6 comprises the rectangular parallelepiped oil storage tank 6, which is formed below and in parallel with the food frying tank H and is connected thereto through the opening 6a formed on upper side wall. The upper end 6c of the opening 6a extended out from the oil storage tank 6 so as to cover the lower end 6b thereof.

After food frying work, the food frying tank H is to be cleaned in the same way as in case of the food fryer A of Fig.1:

First, by opening the cock 6d, one drains the water in the oil storage tank 6 out and pours the used oil in the oil layer area 1 into the oil storage tank 6 through the opening 6a;

Second, by closing the cock 6d at timing that the water in the oil storage tank 6 has been drained out and the oil in the oil layer area 1 has flowed into the oil storage tank 6, thereafter by opening the water discharge cock 11, one drains water in the water layer area 2 out; and

Finally, one cleans empty space in the food frying tank H.

As described above, the upper end 6c of the opening 6 is extended out of the opening 6a so as to over the lower end 6b and is formed at the side wall of the oil storage tank 6, and hence cleaning water and so on for the

cleaning scarcely pours into the oil storage tank 5 during the cleaning work.

When the cleaning for the food frying tank H is finished and the water discharge cock 11 is again closed, as above described, merely pouring water into this tank H allows the oil in the oil storage tank 6 to return to the oil layer area 1, which action is based on the difference in specific gravity between oil and water. And the food fryer G is consequently ready for next food frying work.

Meanwhile, oil in the oil storage tank 6 may be taken to outer space by opening the cock 6d.

Water inlet opening of each the food fryer A, C, E and G is not shown in figures but may be formed at any place of the oil layer area 1. The air cooling tube 4 may be eliminated in also the food fryer A and G.

Each of the food fryers A, C, E and G has no cock for opening and closing the opening 5a, 6a, the production cost is reduced and the cleaning work may be simply easy to be done.

#### Industrial applicability

As above described, the food fryer according to the invention is intended to give safety and efficiency in the cleaning work thereof and to reduce product cost, food fryer which is good for both business use and household use.

Claims:

1. A food fryer having a frying food tank of a water layer area and an oil layer area thereon, comprising:

an oil heating means in the oil layer area;


an oil storage tank formed in the water layer area, having a cock at lower position of the storage tank, and an opening whose upper part overhangs its lower part at upper position of the storage tank; and

wherein water in the oil storage tank is drained out through the cock and oil in the oil layer area flows into the oil storage tank through the opening when the cock is opened.


2. A food fryer claimed in Claim 1 wherein the opening is formed on the upper side wall of the oil storage tank.

3. A food fryer claimed in Claim 1 or Claim 2 wherein a water discharge cock is provided at the low end of the water layer area.


第1図 Fig. 1

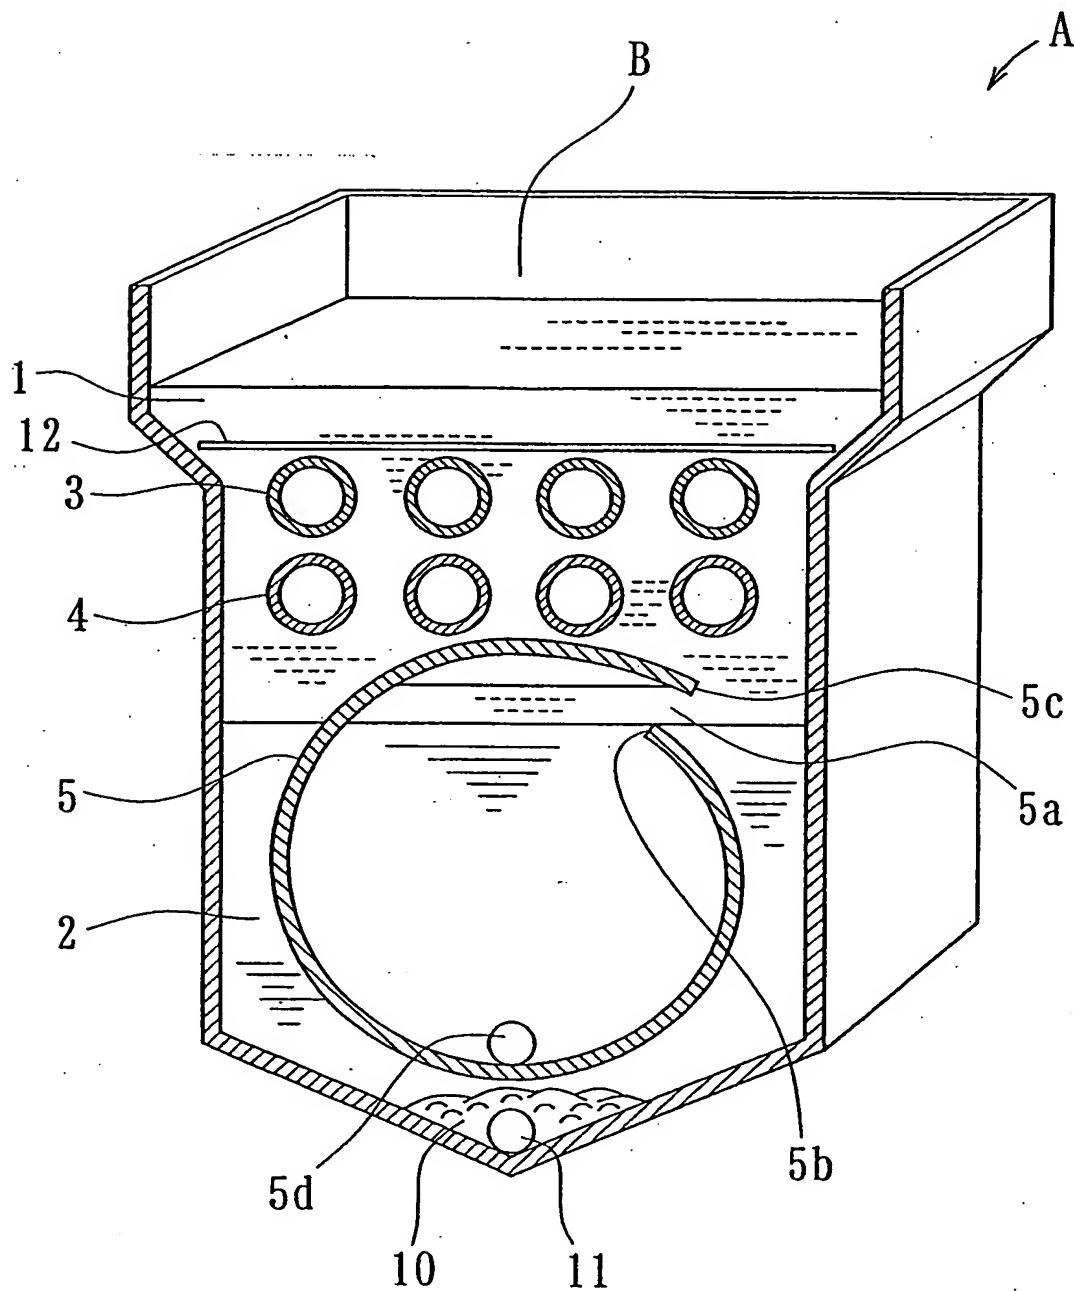

~~第2図~~ Fig. 2

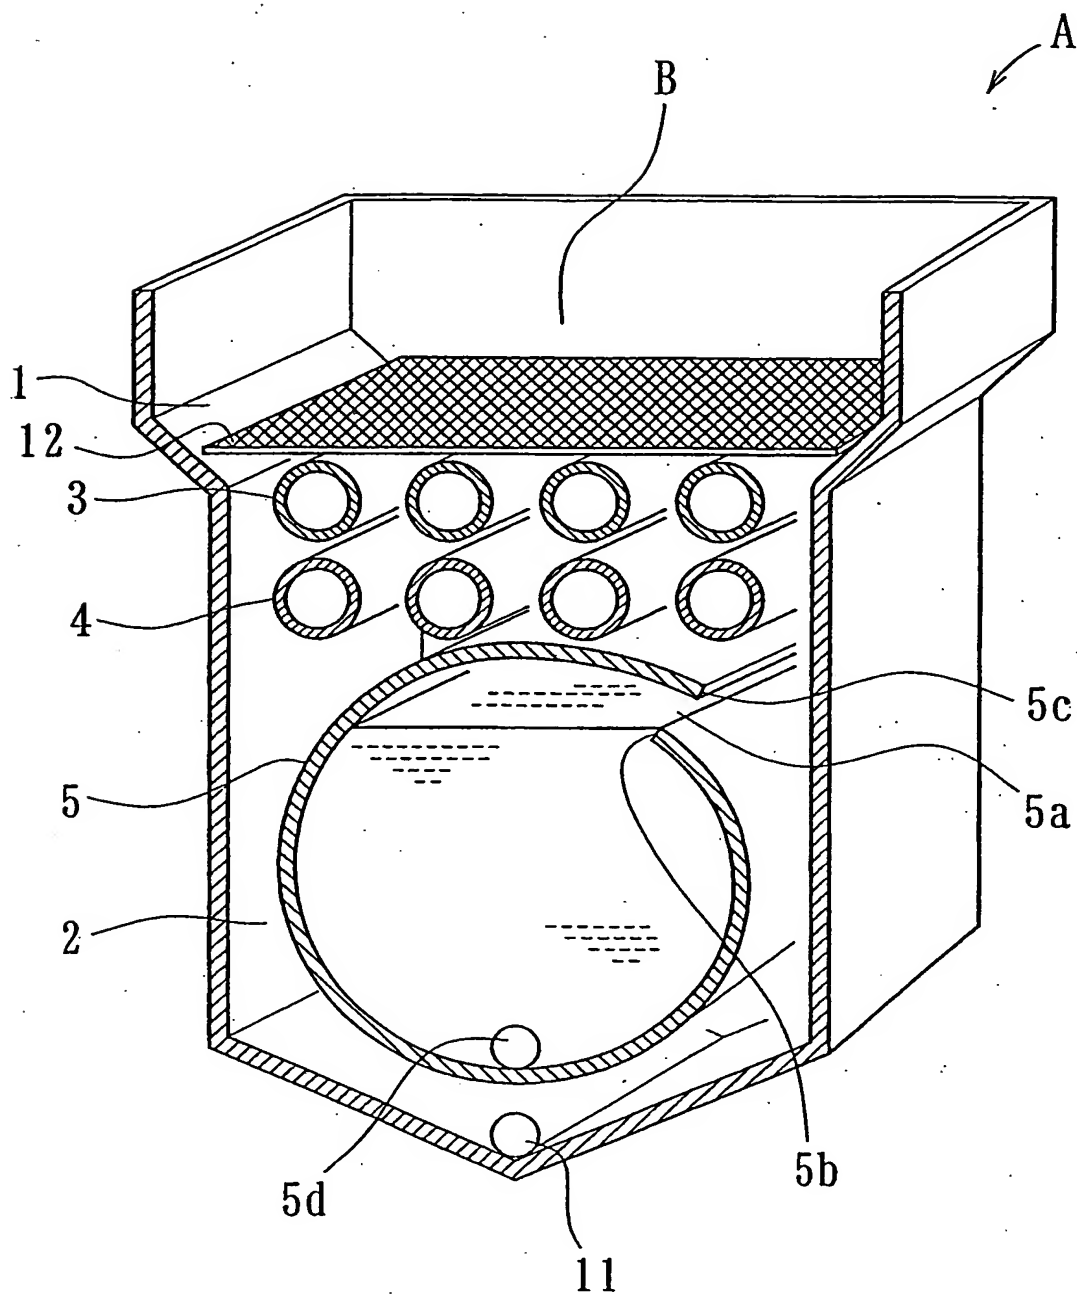


第3図 Fig. 3

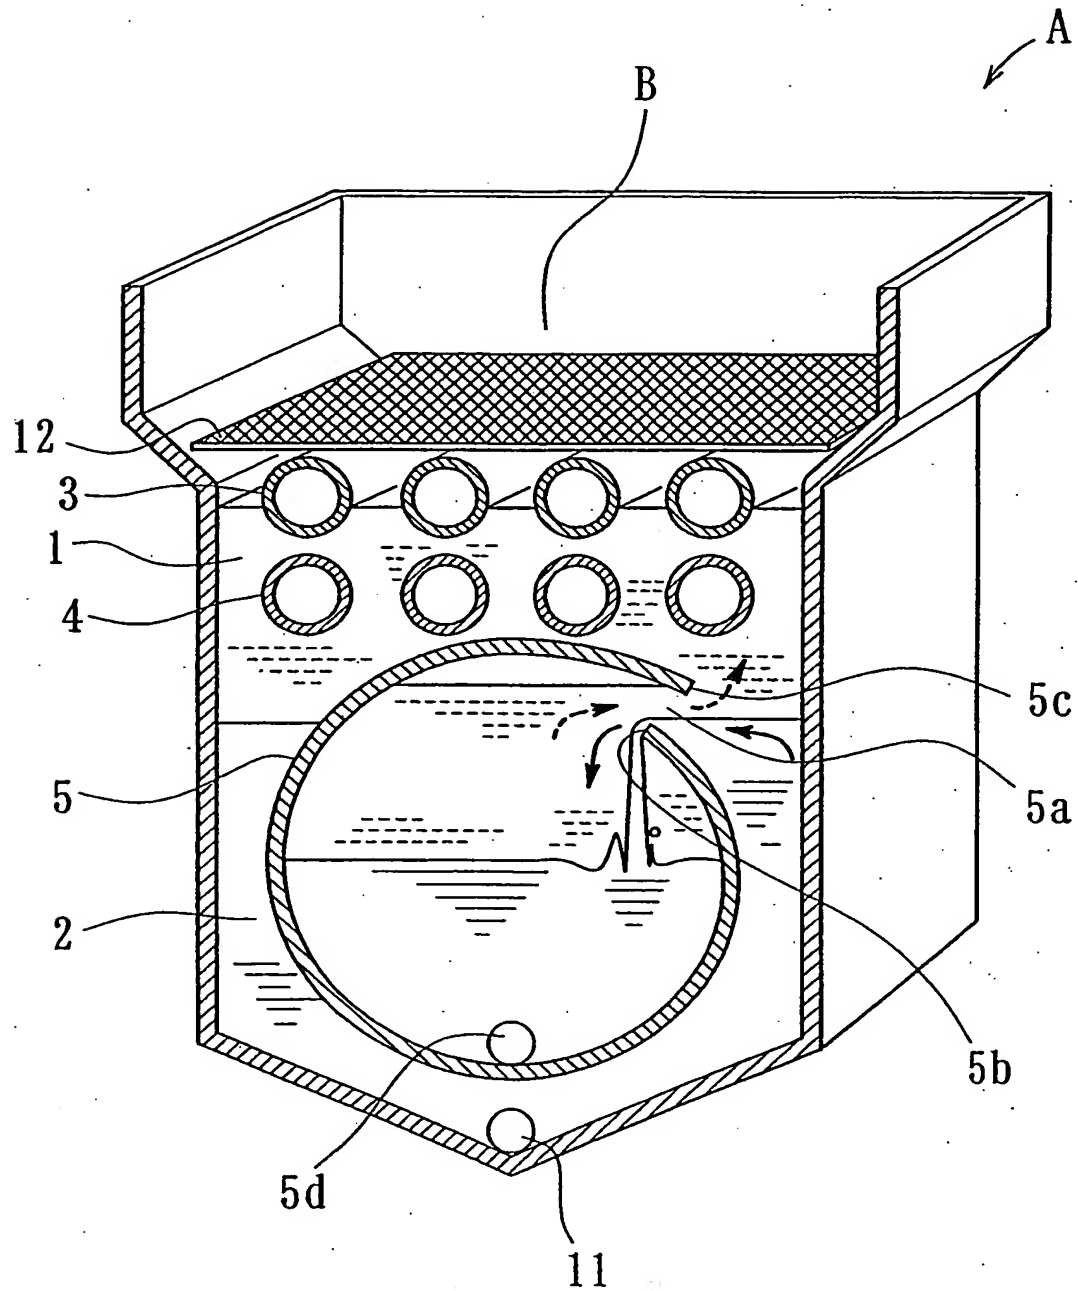




第4図 Fig. 4

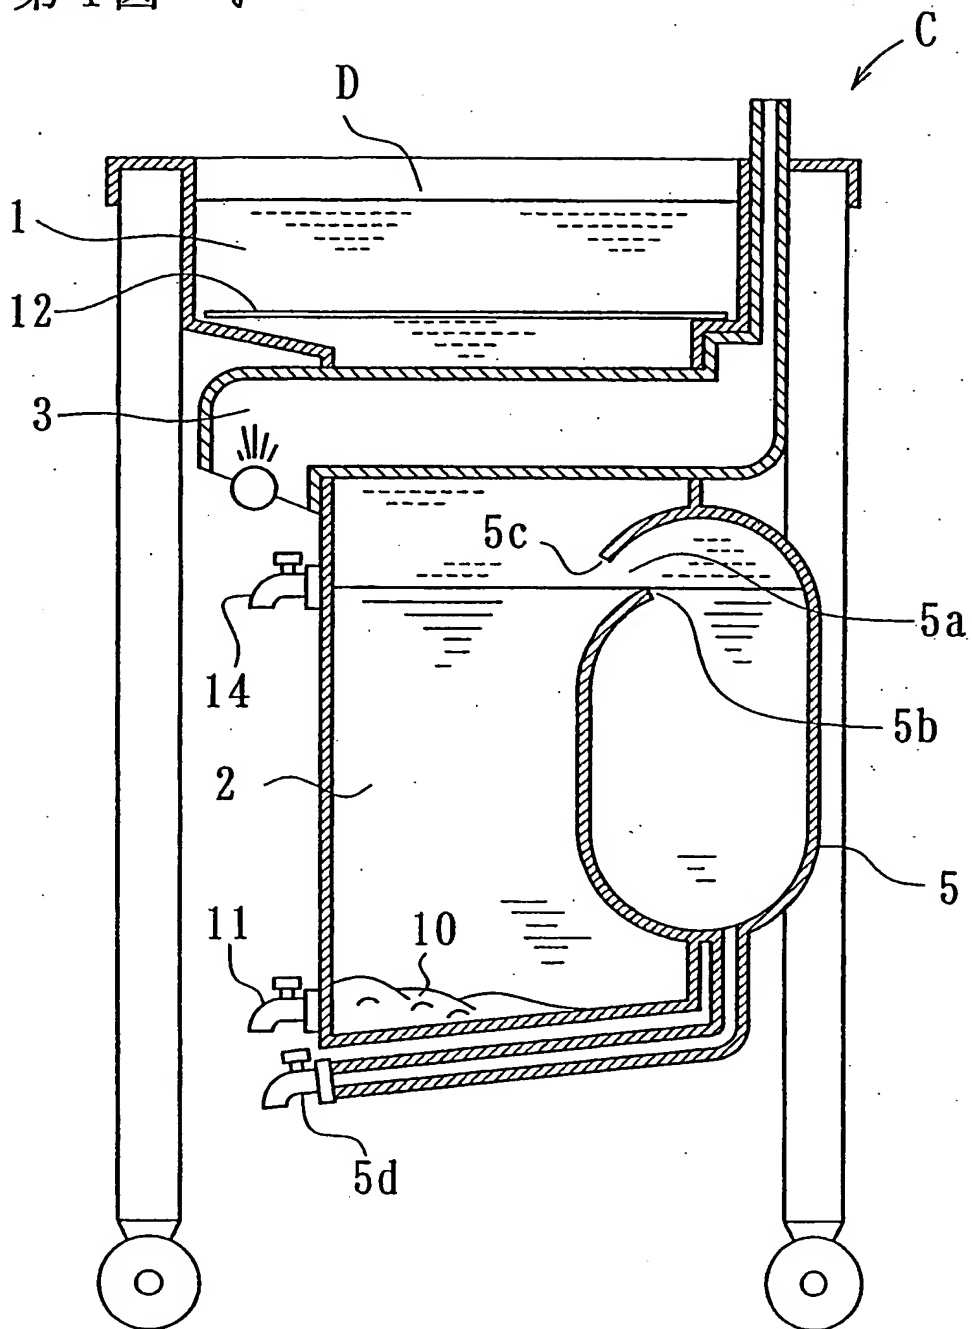

第5図 Fig. 5

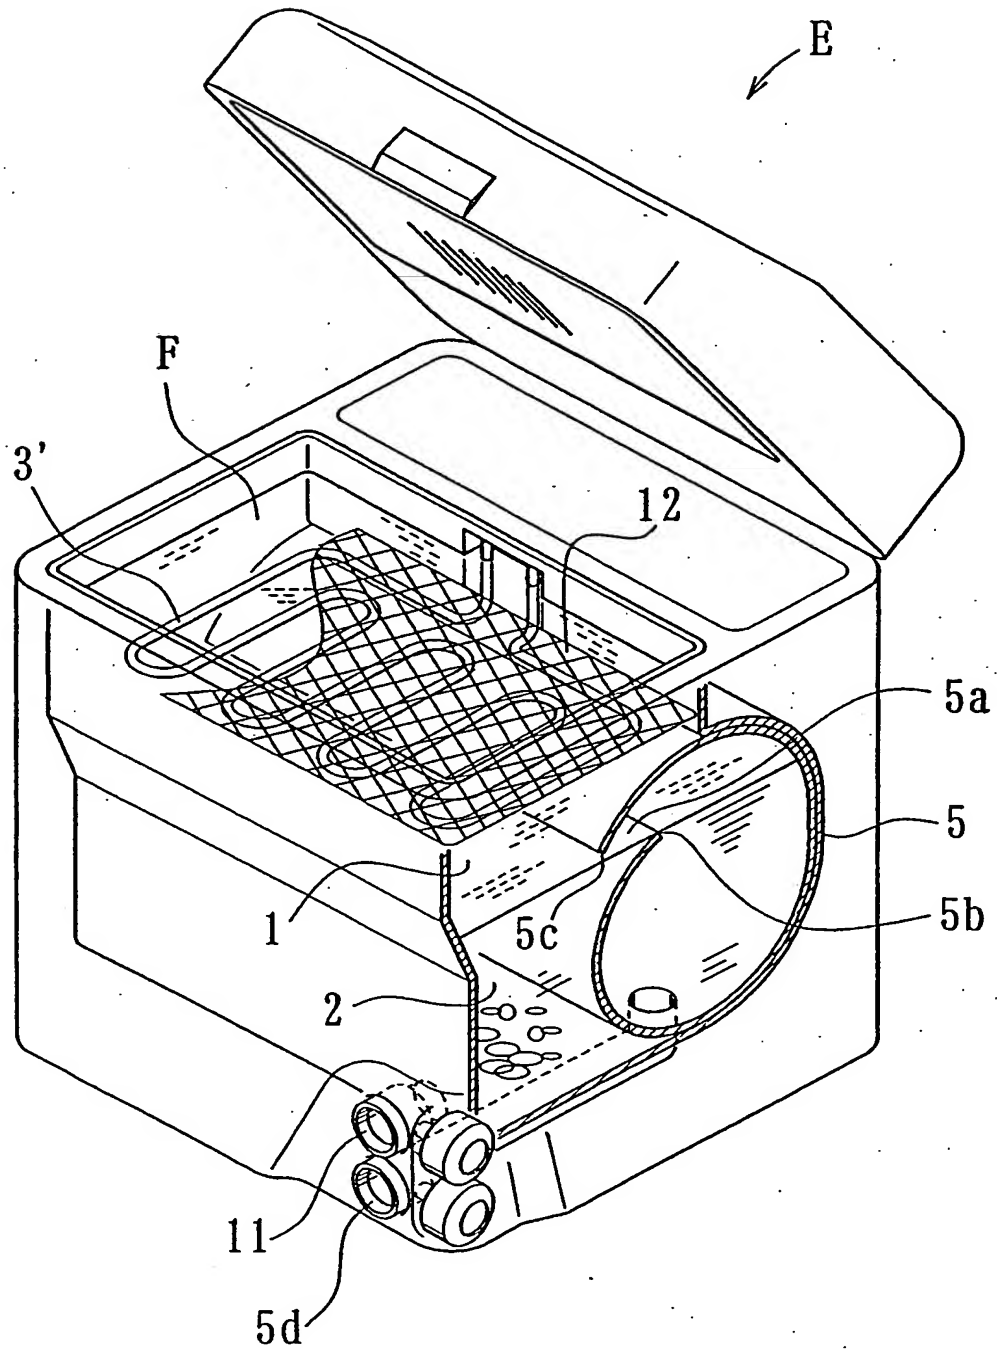

第6図 Fig. 6

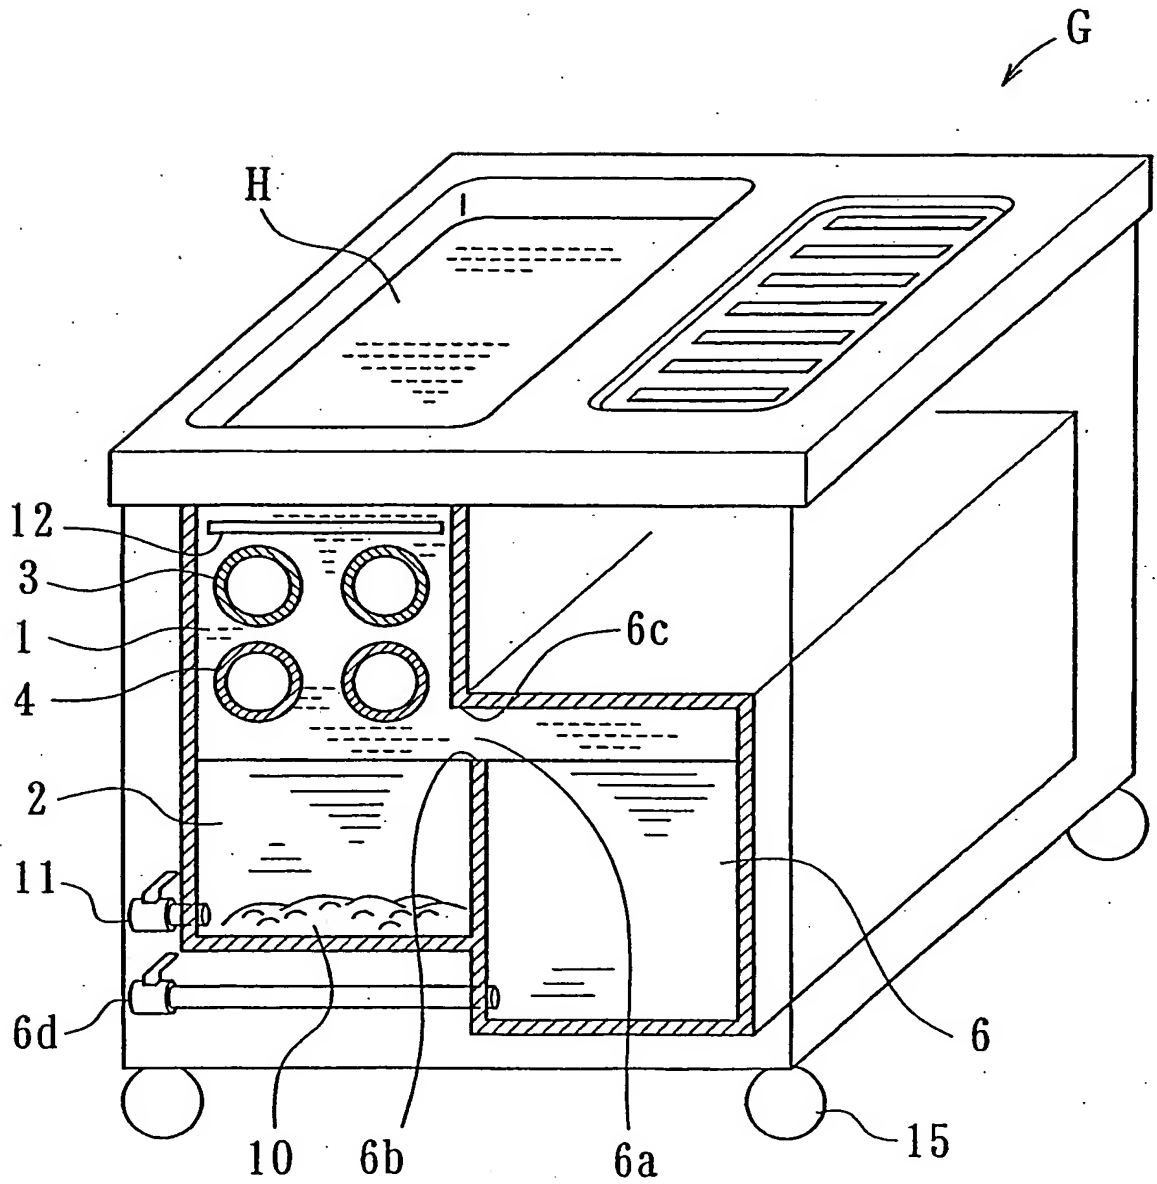


Fig. 7 Prior art  
第7図 先行技術

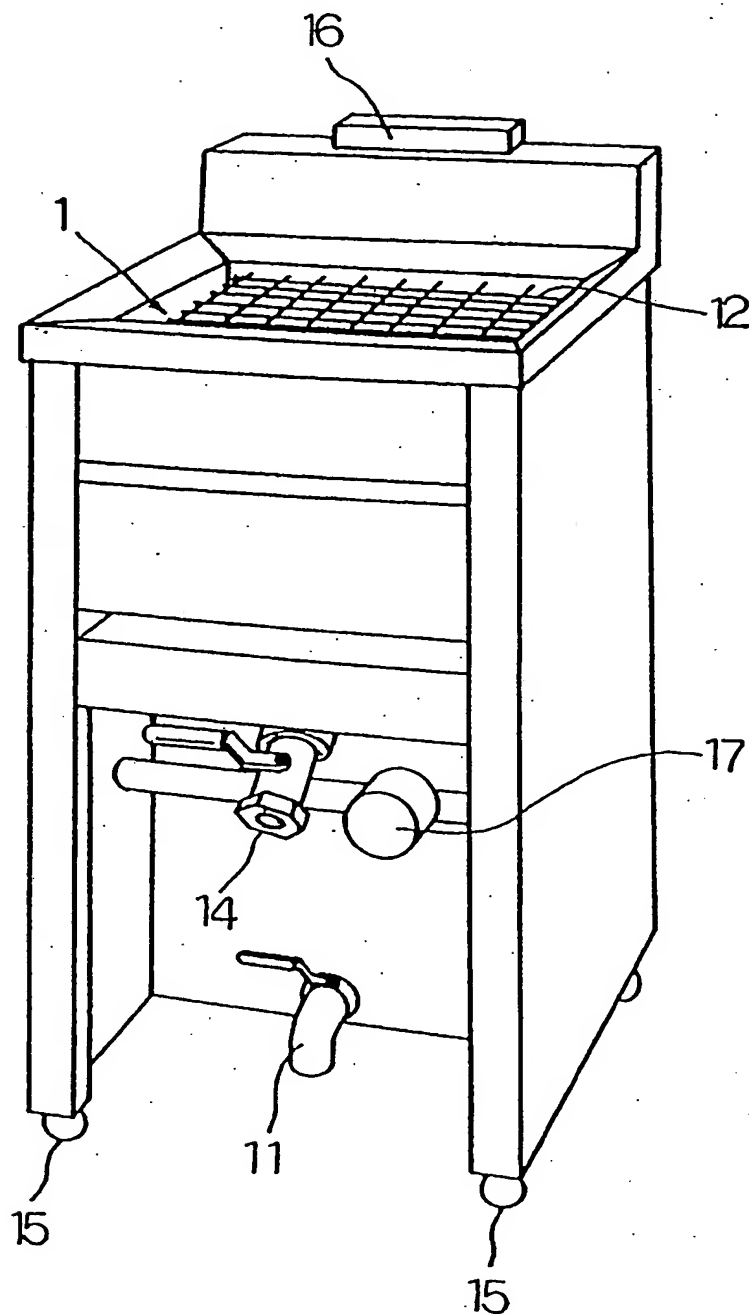


Fig. 8 Prior art

第8図 先行技術

